





# KGD-2212 12-CHANNEL DIGITAL POWER AMPLIFIER

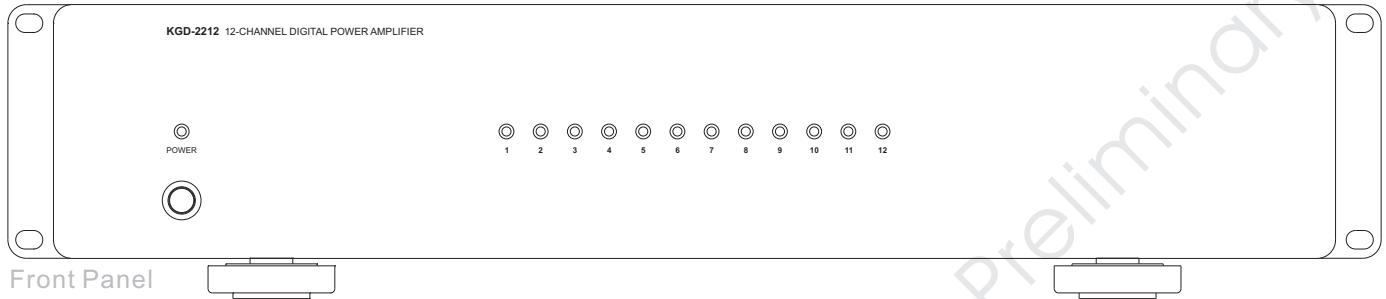

Front Panel

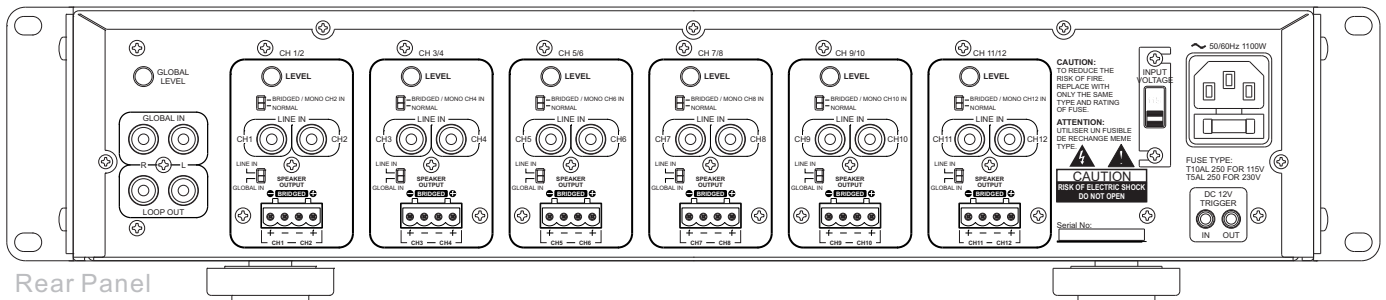

Rear Panel

## Features

- Very high efficiency Class D amplifier design.
- Global input/output.
- Total channel 12 (2 x 6).
- Channel pair bridgeable.
- DC 12V trigger auto control.
- Provide DC 12V trigger input & output.
- Thermal protection.
- Short circuit protection.
- Rack mount ears included.
- Protection LED indication.

## Specification

- Output Power (2-ch driven) 60W/4 ohms @0.1% THD  
40W/8 ohms  
150W/8 ohms/bridged
- Output Power(12-ch driven) 55W/4 ohms @0.1% THD  
37W/8 ohms  
140W/8 ohms/bridged
- T.H.D. 0.03%
- S/N ratio 95 dB
- Frequency Response 20 Hz ~ 20K Hz +-1.0dB
- Input sensitivity 500 mV
- Input impedance 20 k ohms
- Input Trigger 12VDC/10K ohms
- Output Trigger 12VDC/100mA
- Dimension WxHxD 450x100x330 mm
- Weight 14.5 kg

Keiga Electronic Inc. <http://www.keiga.com.tw>

3F-5, NO. 490, PAN-NAN RD., CHUNG HO, TAIPEI HSIEN, TAIWAN, R.O.C.

TEL. : 886-2-82276727 FAX. : 886-2-82276827 Email: keiga@keiga.com.tw